



Datenblatt APE/F/G

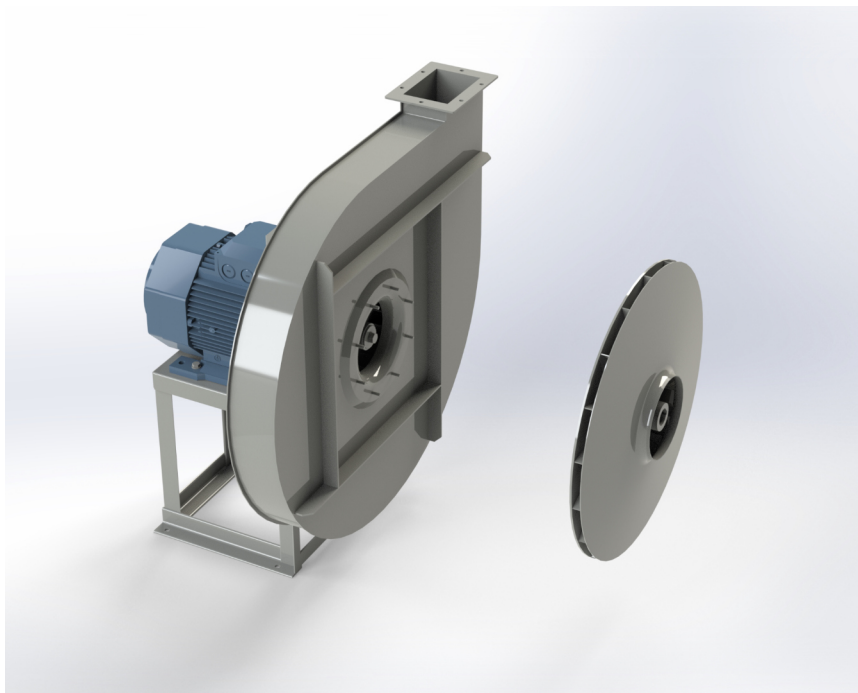

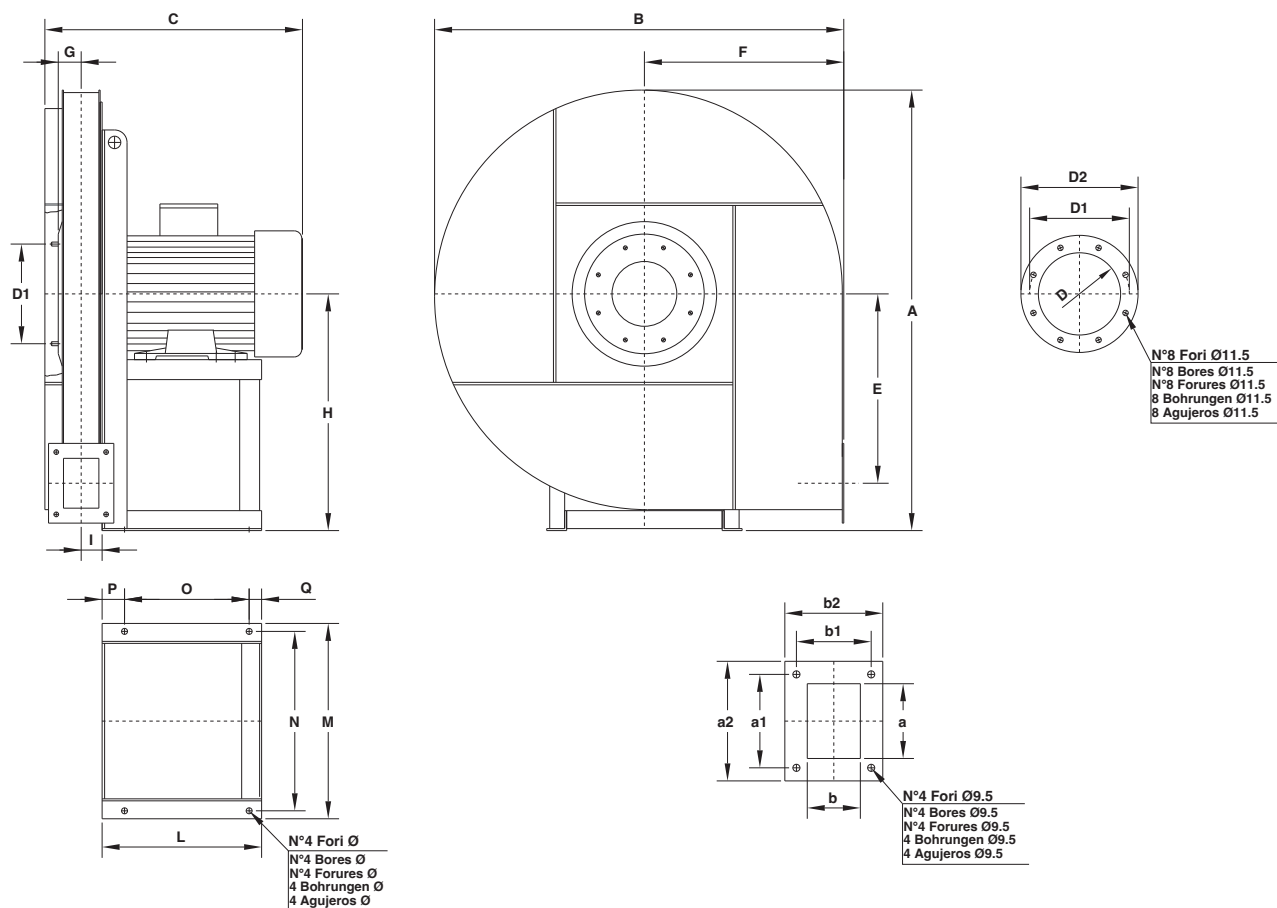


Il ventilatore è orientabile
The fan is revolvable
Le ventilateur est orientable
Ventilatorgehäuse ist drehbar
El ventilador es orientable

Tabella orientamenti
Table of discharge positions

Tableau d'orientation
Tabelle der Gehäusestellungen

Tabla de las orientaciones

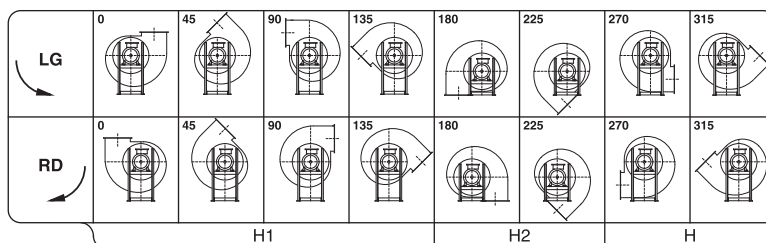

Tipo-Type-Typ-Tipo	Ventilatore Fan Ventilateur Ventilator Ventilador	Motore Motor Moteur Motor Motor	A	B	C	E	F	G	H	H ₁	H ₂	I	L	M	N	O	P	Q	Ø	D	D ₁	D ₂	a	b	a ₁	b ₁	a ₂	b ₂	Peso Weight Poids Gewicht Peso kg	PD ² GD ² kgm ²
APE 351/B	71 A2		560	520	310	223	250	42	300	300	300	36	190	235	215	125	50	15	10	145	182	215	90	63	112	90	150	123	23	0,3
APE 351/A	71 B2		560	520	330	223	250	42	300	300	300	36	190	235	215	125	50	15	10	145	182	215	90	63	112	90	150	123	24	0,4
♦APE 451/B	80 A2		670	620	330	280	300	42	355	355	355	37	190	235	215	125	50	15	10	145	182	215	90	63	112	90	150	123	33	0,6
♦APE 451/A	80 B2		670	620	330	280	300	42	355	355	355	38	190	235	215	125	50	15	10	145	182	215	90	63	112	90	150	123	35	1
♦APE 501/A	90 S2		670	620	370	280	300	42	355	355	355	38	215	270	245	137	60	18	10	145	182	215	90	63	112	90	150	123	35	1
APE 561/B	90 S2		790	730	390	330	355	46	425	425	425	42	215	270	245	137	60	18	10	165	200	235	100	71	125	100	160	131	51	1,6
APE 561/A	90 L2		790	730	390	330	355	46	425	425	425	42	215	270	245	137	60	18	10	165	200	235	100	71	125	100	160	131	51	1,6
APE 631/A	100 LA2		790	730	460	330	355	46	425	425	425	43	260	332	300	200	35	25	12	165	200	235	100	71	125	100	160	131	52	2,3
APE 712/A	112 M2		890	825	460	380	400	50	475	475	475	42	260	332	300	200	35	25	12	165	200	235	100	71	125	100	160	131	72	3,2
APE 711/A	132 SA2		890	825	520	380	400	50	475	475	475	42	320	392	360	250	45	25	12	165	200	235	100	71	125	100	160	131	78	4
APE 801/C	132 SA2		990	920	520	430	450	50	530	530	530	42	320	392	360	250	45	25	12	165	200	235	100	71	125	100	160	131	108	6,3
APE 801/B	132 SB2		990	920	520	430	450	50	530	530	530	42	320	392	360	250	45	25	12	165	200	235	100	71	125	100	160	131	108	6,3
APE 801/A	132 MB2		990	920	520	430	450	50	530	530	530	42	320	392	360	250	45	25	12	165	200	235	100	71	125	100	160	131	108	6,3
APE 901/B	160 MR2		1180	1100	680	520	530	56	630	630	630	49	425	440	400	340	55	30	14	185	219	255	112	80	140	112	172	140	175	10
APE 901/C	160 M2		1180	1100	680	520	530	56	630	630	630	49	425	440	400	340	55	30	14	185	219	255	112	80	140	112	172	140	175	10

Tabella non impegnativa
The above data are unbinding
Tableau sans engagement
Maße unverbindlich
Los datos de la tabla no son vinculantes

Peso ventilatore in kg (senza motore)
Fan weight in kg (without motor)
Poids du ventilateur en kg (sans moteurs)
Ventilator Gewicht in kg (ohne Motor)
Peso del ventilador en kg (sin motor)

♦ Vedere pag. 25
See page 25
Voir page 25
Siehe Seite 25
Consulte la página 25



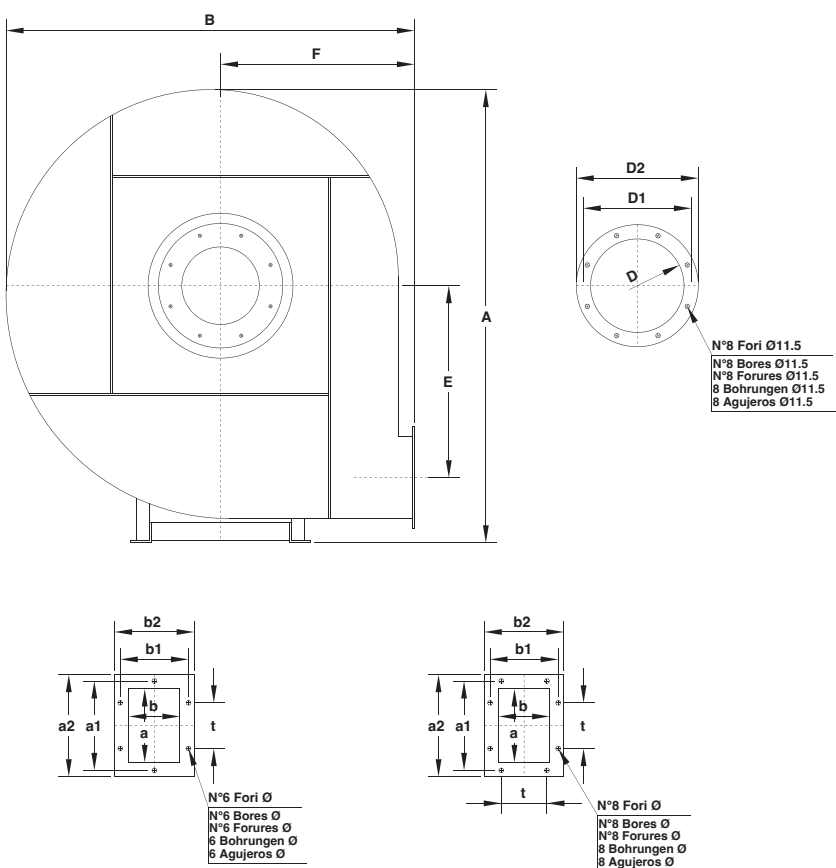


Tabella orientamenti
Table of discharge positions

Tableau d'orientation
Tabelle der Gehäusestellungen

Tabla de las orientaciones

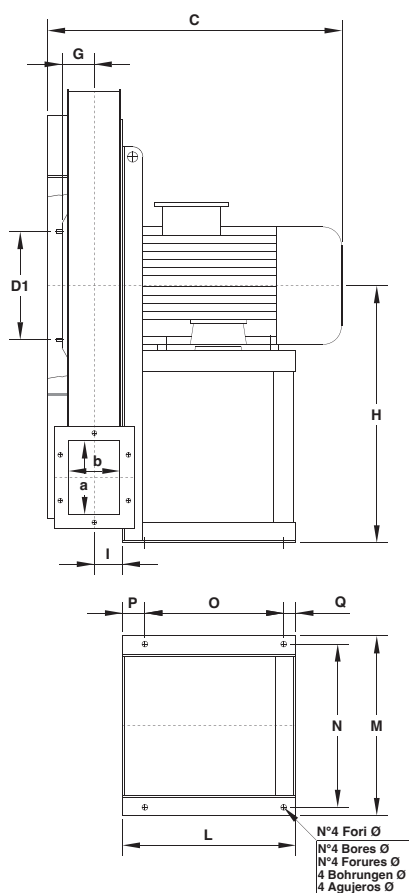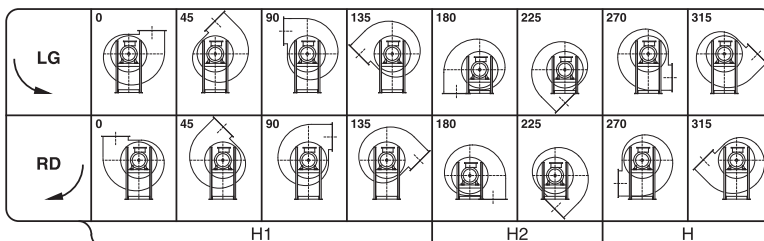

Il ventilatore è orientabile
The fan is revolvable
Le ventilateur est orientable
Ventilatorgehäuse ist drehbar
El ventilador es orientable

Tipo-Type-Typ-Tipo			Ventilatore Fan Ventilateur Ventilator									Basamento Base Chassis Sockel Base								Flangia aspirante Inlet flange Bride a l'aspiration Flansch saugseitig Brida aspirante			Flangia premente Outlet flange Bride en refoulement Flansch drückseitig Brida impelente										Peso Weight Poids Gewicht Peso	PD ² GD ²
Ventilatore Fan Ventilateur Ventilator	Motore Motor Moteur Motor		A	B	C	E	F	G	H	H ₁	H ₂	I	L	M	N	O	P	Q	Ø	D	D ₁	D ₂	a	b	a ₁	b ₁	a ₂	b ₂	t	N°	Ø	kg	kgm²	
♦ APF 502/A*	90 L2	100 LA2	800	735	405 475	337	355	61	450	450	450	53	215 260	270 332	245 300	137 200	60 35	18 25	10 12	165	200	235	125	90	165	130	185	150	100	6	9,5	44 46	0,9	
♦ APF 502/B				830	490	380	400	65	500	500	500	58	260 320	332 392	300 360	200 250	35 45	25	12	185	219	255	140	100	182	141	210	170	112	6	11,5	60 62	2,1	
APF 561/A	112 M2	132 SA2																																
APF 561/B																																		
APF 632/A	132 SA2																																2,8	
APF 632/B	132 SB2		1000	900	565	420	425	71	560	560	560	63	320	392	360	250	45	25	12	205	241	275	160	112	200	153	230	182	112	6	11,5	66		
APF 631/A	132 SB2																																3,2	
APF 631/B	132 MB2																																	
APF 712/A*	132 SB2				590								320	392	360	250	45	25	12													108		
APF 712/B*	132 MB2																																	
APF 712/C	160 MR2																																5,5	
APF 712/D	160 M2		1120	1010	725	470	475	80	630	630	630	71	425	440	400	340	55	30	14	229	265	299	180	125	219	167	250	195	112	6	11,5	141		
APF 711/A	160 MR2																																	
APF 711/B	160 M2																																6,2	
APF 711/C	160 L2																																	
APF 802/A	160 M2												425	440	400	340	55	30														220		
APF 802/B	160 L2												425	440	400	340	55	30														237		
APF 802/C	180 M2												470	500	450	370	65	35																
APF 801/A	160 M2		1250	1120	740	530	530	90	710	710	710	80	425	440	400	340	55	30	14	255	292	325	200	140	241	182	270	210	112	8	11,5	222		
APF 801/B	160 L2												425	440	400	340	55	30																
APF 801/C	180 M2												470	500	450	370	65	35														237		
APF 801/D	200 LR2				815								500	570	510	385	75	40	16													250		
APF 902/A	180 M2				765								470	500	450	370	65		14													302		
APF 902/B	200 LR2				840								500	570	510	385	75		16													325		
APF 902/C	200 L2				840								550	570	510	385	75		16													340		
APF 902/D	225 M2		1410	1265	915	598	600	103	800	710	710	90	550	626	565	425	85		19	286	332	366	224	160	265	200	294	230	112	8	11,5	340		
APF 901/A	200 LR2				840								500	570	510	385	75	40	16														335	
APF 901/B	200 L2				840								500	570	510	385	75		16															
APF 901/C	225 M2				915								550	626	565	425	85		19														380	
APF 901/D	250 M2				915								600	686	615	460	95	45	21														400	18,5

Tabella non impegnativa
The above date are unbinding
Tableau sans engagement
Maße unverbindlich
Los datos de la tabla no son vinculantes

*** Ventilatori non a listino, esecuzione su richiesta**
The fans are not in our Price List, production on request
Ventilateurs hors catalogue, fabrication sur demande
Der Ventilatoren sind nicht in unsere Preisliste erhalten, Produktion auf Anfrage
Ventilador no estandard, construcción bajo pedido

Peso ventilatore in kg (senza motore)
Fan weight in kg (without motor)
Poids du ventilateur en kg (sans moteurs)
Ventilator Gewicht in kg (ohne Motor)
Peso del ventilador en kg (sin motor)

♦ Vedere pag. 25
See page 25
Voir page 25
Siehe Seite 25
Consulte la pagina 25










Tabella orientamenti
Table of discharge positions

Tableau d'orientation
Tabelle der Gehäusestellungen

Tabla de las orientaciones

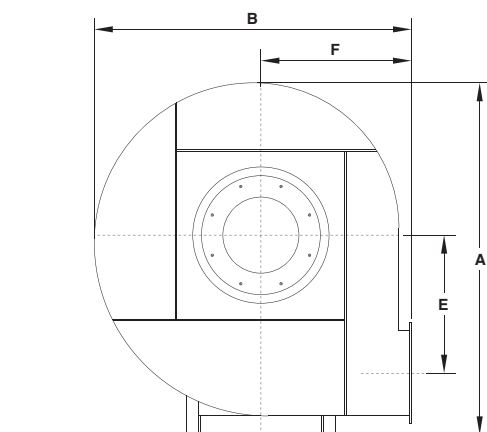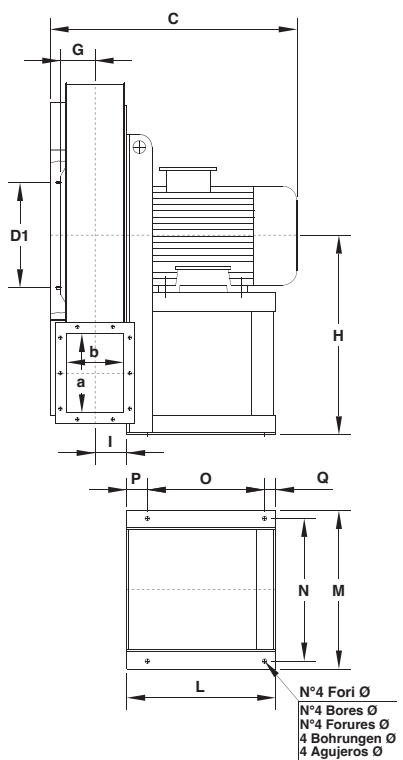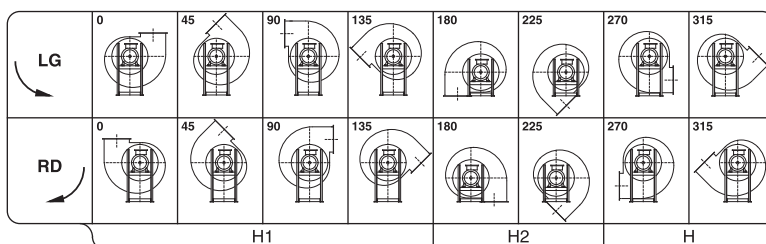

Il ventilatore è orientabile
The fan is revolvable
Le ventilateur est orientable
Ventilatorgehäuse ist drehbar
El ventilador es orientable

Tipo-Type-Tipo-Tipo	Ventilatore Fan Ventilateur Ventilador	Motore Motor Moteur Motor	Ventilatore Fan Ventilateur Ventilador								Basamento Base Chassis Sockel Base								Flangia aspirante Inlet flange Bride a l'aspiration Flansch saugseitig Brida aspirante			Flangia premonte Outlet flange Bride en refoulement Flansch drückseitig Brida impenlente								Peso Weight Poids Gewicht Peso kg	PD2 GD2 kgm²		
			A	B	C	E	F	G	H	H ₁	H ₂	I	L	M	N	O	P	Q	Ø	D	D ₁	D ₂	a	b	a ₁	b ₁	a ₂	b ₂	t			N°	Ø
♦ APG 502/A	100 LA2		510									260	332	300	200	35															46	1	
♦ APG 502/B	112 M2		510									260	332	300	200	35															47		
♦ APG 502/C*	132 SA2	800 735	570	310	355	77	450	450	355	69		320	392	360	250	45															55		
♦ APG 501/A	112 M2		510									260	332	300	200	35	25	12	205	241	275	180	125	219	167	250	195	112	6	11,5	50		
♦ APG 501/B	132 SA2		570									320	392	360	250	45															56	1,2	
♦ APG 501/C	132 SB2		570									320	392	360	250	45																	
APG 562/A	132 SA2		595									320	392	360	250	45	25														80		2
APG 562/B	132 SB2		595									320	392	360	250	45	25	12															
APG 562/C	132 MB2		595									320	392	360	250	45	25																
APG 562/D*	160 MR2	900 830	730	350	400	87	500	500	400	78		425	440	400	340	55	30	14	229	265	299	200	140	241	182	270	210	112	8	11,5	108		
APG 561/A	132 SB2		595									320	392	360	250	45	25	12														85	2,3
APG 561/B	132 MB2		595									320	392	360	250	45	25	12															
APG 561/C	160 MR2		730									425	440	400	340	55	30	14															
APG 561/D	160 M2		730									425	440	400	340	55	30	14															
APG 632/A*	132 MB2		615									320	392	360	250	45	25	12														98	2,9
APG 632/B	160 MR2											425	440	400	340	55	30																
APG 632/C	160 M2											425	440	400	340	55	30																
APG 632/D	160 L2	1000 900	750	388	425	100	560	560	425	88		425	440	400	340	55	30	14	255	292	325	224	160	265	200	294	230	112	8	11,5	140		
APG 631/A	160 M2											425	440	400	340	55	30															150	3,4
APG 631/B	160 L2											425	440	400	340	55	30																
APG 631/C*	180 M2		760									470	500	450	370	65	35																
APG 712/A*	160 L2		780									425	440	400	340	55	30	14															
APG 712/B	180 M2		790									470	500	450	370	65	35	14														171	5,6
APG 712/C	200 LR2		855									500	570	510	385	75	40	16															
APG 711/A*	180 M2	1120 1005	780	435	475	110	630	630	475	98		470	500	450	370	65	35	14	286	332	366	250	180	292	219	320	250	112	10	11,5	182		
APG 711/B	200 LR2		855									500	570	510	385	75	40	16															
APG 711/C	200 L2		855									500	570	510	385	75	40	16														210	
APG 711/D	225 M2		930									550	626	565	425	85	40	19														192	6,8
APG 802/A*	200 LR2		875									500	570	510	385	75	40	16															
APG 802/B	200 L2		875									500	570	510	385	75	40	16															
APG 802/C	225 M2		955									550	626	565	425	85	40	19															
APG 802/D*	250 M2	1250 1120	980	490	530	120	710	710	530	110		600	686	615	460	95	45	21	321	366	401	280	200	332	249	360	280	125	10	11,5	240	11	
APG 801/A*	225 M2		955									550	626	565	425	85	40	19															
APG 801/B	250 M2		960									600	686	615	460	95	45	21															
APG 801/C	280 S2		1085									700	760	680	550	100	50	24															
APG 902/A*	250 M2		980									600	686	615	460	95	45	21														315	15
APG 902/B	280 S2											700	760	680	550	100	50	24															
APG 902/C	280 M2											700	760	680	550	100	50	24															
APG 902/D*	315 S2	1410 1265	1110	552	600	135	800	710	600	122		770	860	770	605	110	55	24														387	
APG 901/A	280 S2											650	760	680	500	100	50	21	361	405	441	315	224	366	273	395	304	125	10	11,5	405	19	
APG 901/B	280 M2											700	760	680	550	100	50	24															
APG 901/C	315 S2											770	860	770	605	110	55	24															
APG 901/D	315 M2		1255									770	860	770	605	110	55	24															