


Datenblatt TF

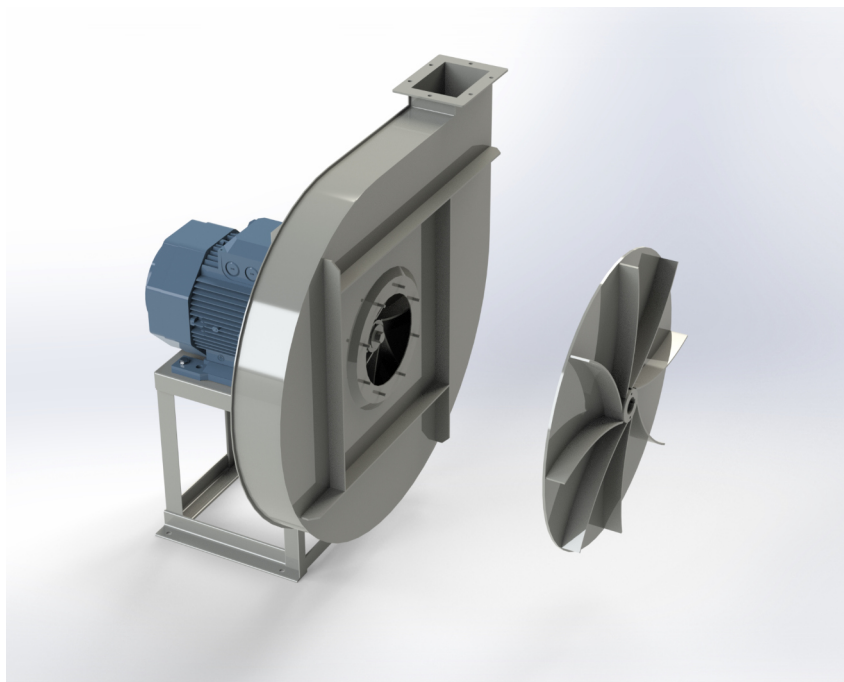

Tipo - Type - Typ - Tipo Ventilatore Fan Ventilateur Ventilator Ventilador	Motore Motor Moteur Motor Motor	kW ass.	kW inst.	n. min. ⁻¹	Lp dB/A	V = m³/min																											
						3	4	5	5,6	6,3	7,1	8	9	10	12	14	16	18	20	22	25	28	31	35	40	45	50	56	63	71	80		
						Pt = kgf/m²																											
TF 501/A	90 L2	2	2,2	2850	82	460	460	465	465	465	465	465	465	465	460																		
TF 501/B	100 LA2	2,8	3	2900	83	460	460	465	465	465	465	465	465	465	460	445	440	430	410	405													
TF 561/A	100 LA2	2,8	3	2900	85			585	585	590	590	595	595	595	590																		
TF 561/B	112 M2	3,7	4	2900	85			585	585	590	590	595	595	595	590	590	585	580	575	565													
TF 631/A	132 SA2	5	5,5	2900	89						720	725	730	735	735	735	735	735	730														
TF 631/B	132 SB2	7	7,5	2900	89						720	725	730	735	735	735	735	735	730	725	720	705	695										
TF 711/A	132 MB2	8,5	9	2900	91										940	945	945	950	950	950													
TF 711/B	160 MR2	10,5	11	2950	92										940	945	945	950	950	950	950	950	945	935									
TF 711/C	160 M2	14,5	15	2950	92										940	945	945	950	950	950	950	950	945	935	925	905	880	850					
TF 801/A	160 M2	14,5	15	2950	94											1180	1185	1190	1195	1200	1200	1200											
TF 801/B	160 L2	18	18,5	2950	95											1180	1185	1190	1195	1200	1200	1200	1200	1200	1200	1190							
TF 801/C	180 M2	21	22	2950	96											1180	1185	1190	1195	1200	1200	1200	1200	1200	1200	1190	1175	1150					
TF 801/D	100 LB4	2,5	3	1450	78									275	275	275	270	270	270	265	265	260	255										
TF 801/E	112 M4	3,2	4	1450	79									275	275	275	270	270	270	265	265	260	255	250	245								
TF 901/A	132 SA4	4,6	5,5	1450	81											355	355	355	350	350	350	345	340	335	330	325							
TF 901/B	132 MA4	5,5	7,5	1450	82											355	355	355	350	350	350	345	340	335	330	325	320	310					
TF 1001/A	160 M4	9,5	11	1450	85												440	440	440	440	440	435	430	425	420	415	410	405	400	395	385		

Tolleranza sulla portata ± 5 %
Capacity tolerance ± 5 %
Tolérance sur le débit ± 5 %

Fördertoleranz ± 5 %
Tolerancia en el caudal ± 5%

Tolleranza sulla rumorosità + 3 dB
Noise level tolerance + 3 dB
Tolérance sur niveau sonore + 3 dB

Toleranz Schallpegel + 3 dB
Tolerancia de la intensidad acústica + 3 dB

Tipo - Type - Typ - Tipo Ventilatore Fan Ventilateur Ventilator Ventilador	Motore Motor Moteur Motor Motor					V = m³/min																											
						3	4	5	5,6	6,3	7,1	8	9	10	12	14	16	18	20	22	25	28	31	35	40	45	50	56	63	71	80		
						Pt = kgf/m²																											
TF 501/A	90 L2	2	2,2	2850	84	440	440	445	445	445	445	455	455	455	440	440	435																
TF 501/B	100 LA2	2,8	3	2900	85	440	440	445	445	445	445	455	455	455	440	440	435	420	400	390													
TF 561/A	100 LA2	2,8	3	2900	87			550	550	555	555	560	560	560	555																		
TF 561/B	112 M2	3,7	4	2900	87			550	550	555	555	560	560	560	555	555	550	550	545	540													
TF 631/A	132 SA2	5	5,5	2900	91						670	675	680	685	690	690	690	685	685	680													
TF 631/B	132 SB2	7	7,5	2900	91						670	675	680	685	690	690	690	685	685	680	675	670	655	640									
TF 711/A	132 MB2	8,5	9	2900	93										855	860	860	860	860	860	860												
TF 711/B	160 MR2	10,5	11	2950	94										855	860	860	860	860	860	860	860	855	850									
TF 711/C	160 M2	14,5	15	2950	94										855	860	860	860	860	860	860	860	855	850	840	825	805	780					
TF 801/A	160 M2	14,5	15	2950	96												1040	1045	1050	1055	1055	1055	1055										
TF 801/B	160 L2	18	18,5	2950	97												1040	1045	1050	1055	1055	1055	1055	1055	1055	1055	1045						
TF 801/C	180 M2	21	22	2950	98												1040	1045	1050	1055	1055	1055	1055	1055	1055	1055	1045	1030	1010				
TF 801/D	100 LB4	2,5	3	1450	80									260	260	260	260	260	260	260	260	255	250										
TF 801/E	112 M4	3,2	4	1450	81									260	260	260	260	260	260	260	260	255	250	245	240								
TF 901/A	132 SA4	4,6	5,5	1450	83											330	330	330	330	330	330	330	325	325	320	315							
TF 901/B	132 MA4	5,5	7,5	1450	84											330	330	330	330	330	330	330	325	325	320	315	310	305					
TF 1001/A	160 M4	9,5	11	1450	87												410	410	410	410	410	410	410	410	405	405	400	395	390	385	375		

Tolleranza sulla portata ± 5 %
Capacity tolerance ± 5 %
Tolérance sur le débit ± 5 %

Fördertoleranz ± 5 %
Tolerancia en el caudal ± 5%

Tolleranza sulla rumorosità + 3 dB
Noise level tolerance + 3 dB
Tolérance sur niveau sonore + 3 dB

Toleranz Schallpegel + 3 dB
Tolerancia de la intensidad acústica + 3 dB


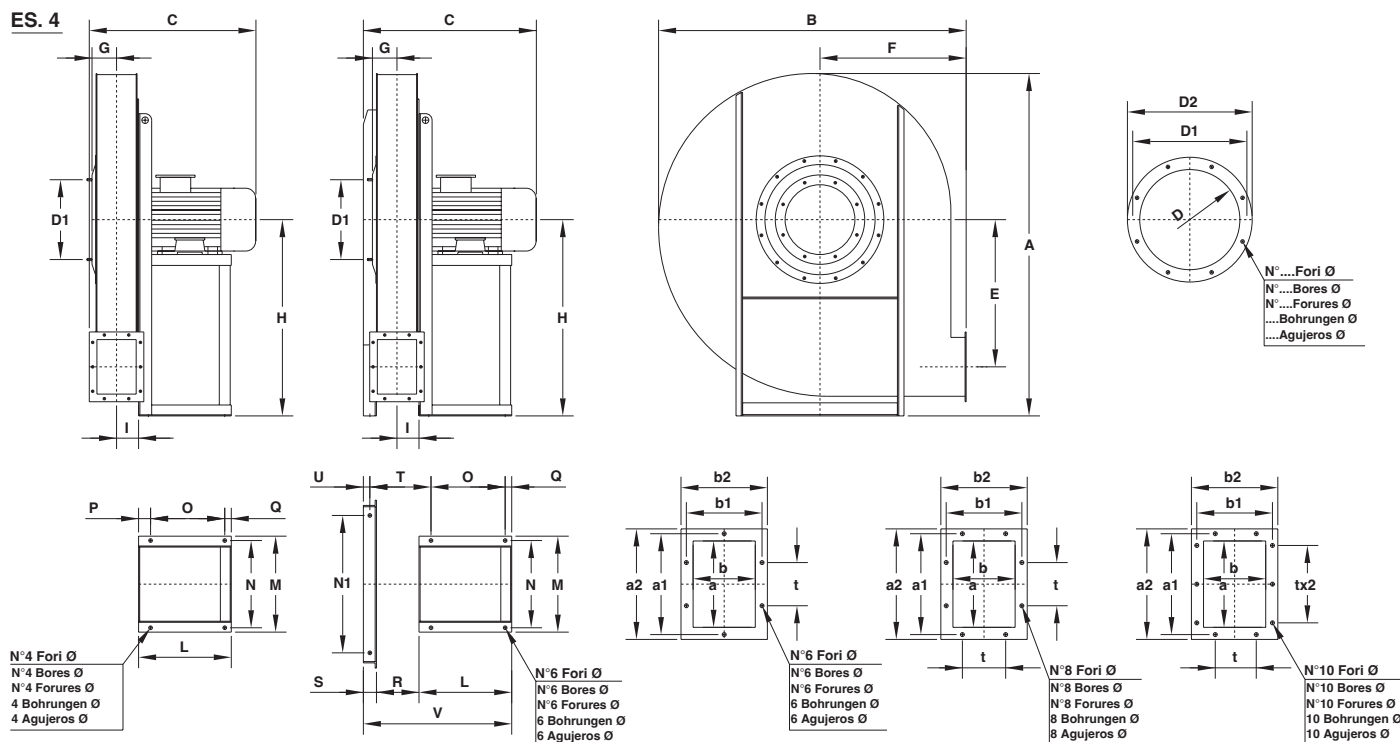


Tabella orientamenti
Table of discharge positions

Tableau d'orientation
Table de der Gehäusestellungen

Tabla de las orientaciones

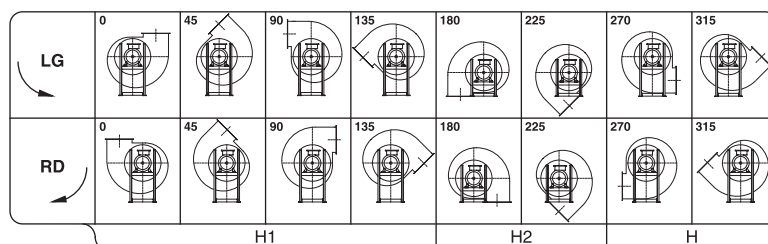

501 ÷ 901

Il ventilatore è orientabile
The fan is revolvable
Le ventilateur est orientable
Ventilatorgehäuse ist drehbar
El ventilador es orientable

1001

Il ventilatore non è orientabile
The fan is not revolvable
Le ventilateur n'est pas orientable
Ventilatorgehäuse ist nicht drehbar
El ventilador no es orientable

Tipo - Type - Typ - Tipo Ventilatore Fan Ventilateur Ventilator Ventilador	Motore Motor Moteur Motor Motor	Ventilatore Fan Ventilateur Ventilator Ventilador										Basamento Base Chassis Sockel Base										Flangia aspirante Inlet flange Bride a l'aspiration Flansch saugseitig Brida aspirante					Flangia premente Outlet flange Bride en refoulement Flansch druckseitig Brida impelente										Peso Weight Poids Gewicht Peso	PD² GD²				
		A	B	C	E	F	G	H	H ₁	H ₂	I	L	M	N	N ₁	O	P	Q	R	S	T	U	V	Ø	D	D ₁	D ₂	N°	Ø	a	b	a ₁	b ₁	a ₂	b ₂	t	N°	Ø	Kg	Kg dm²		
TF 501/A	90 L2			405	337	355	59	450	450	355	53	215	270	245	-	137	60	18	-	-	-	-	-	10	165	200	235	8	11,5	125	90	165	130	185	150	100	6	9,5	45	1		
TF 501/B	100 LA2	795	730	475								260	332	300		200	35	25	-	-	-	-	-	12																49	1	
TF 561/A	100 LA2	890	830	490	380	400	65	500	500	400	58	260	332	300	-	200	35	25	-	-	-	-	-	12	185	219	255	8	11,5	140	100	182	141	210	170	112	6	11,5	61	1,8		
TF 561/B	112 M2			490																																				63	1,8	
TF 631/A	132 SA2			565	420	425	71	560	560	425	63	320	392	360	-	250	45	25	-	-	-	-	-	12	205	241	275	8	11,5	160	112	200	153	230	182	112	6	11,5	77	3,2		
TF 631/B	132 SB2	990	895	565																																				77	3,2	
TF 711/A	132 MB2			590								320	392	360		250	45	25						12																	98	5,5
TF 711/B	160 MR2	1115	1005	725	470	475	80	630	630	475	71	425	440	400	-	340	55	30	-	-	-	-	-	14	229	265	299	8	11,5	180	125	219	167	250	195	112	6	11,5	118	5,5		
TF 711/C	160 M2			725								425	440	400		340	55	30						14																	118	5,5
TF 801/A	160 M2			740								425	440	400		340	55	30						14																	208	9,5
TF 801/B	160 L2			740								445	440	400		360	55	30						14																	208	9,5
TF 801/C	180 M2	1250	1120	815	530	530	90	710	710	530	80	470	500	450	-	370	65	35	-	-	-	-	-	14	255	292	325	8	11,5	200	140	241	182	270	210	112	8	11,5	232	9,5		
TF 801/D	100 LB4			545								260	332	300		200	35	25						12																	185	9,5
TF 801/E	112 M4			545								260	332	300		200	35	25						12																	191	9,5
TF 901/A	132 SA4			630	598	660	103	800	710	600	90	320	392	360	-	250	45	25	-	-	-	-	-	12	286	332	366	8	11,5	224	160	265	200	294	230	112	8	11,5	288	13,5		
TF 901/B	132 MA4	1410	1265	630																																					288	13,5
TF 1001/A	160 M4	1570	1410	795	675	670	112	900	800	670	100	425	440	400	630	340	-	30	195	60	280	30	680	14	321	366	401	8	11,5	250	180	292	219	320	250	112	10	11,5	403	25		

Tabella non impegnativa
The above data are unbinding
Tableau sans engagement
Maße unverbindlich
Los datos de la tabla no son vinculantes.

Peso ventilatore in kg (senza motore)
Fan weight in kg (without motor)
Poids du ventilateur en kg (sans moteurs)
Ventilator Gewicht in kg (ohne Motor)
Peso del ventilador en kg (sin motor)